

A車



■車両

長さ 10.5 m

幅 2.495 m (拡張: 1.0 m)


高さ 3.55 m

■発電機

富永物産製 HIT-20KK-31 φ

AC100V 50/60Hz 20KVA

配置図

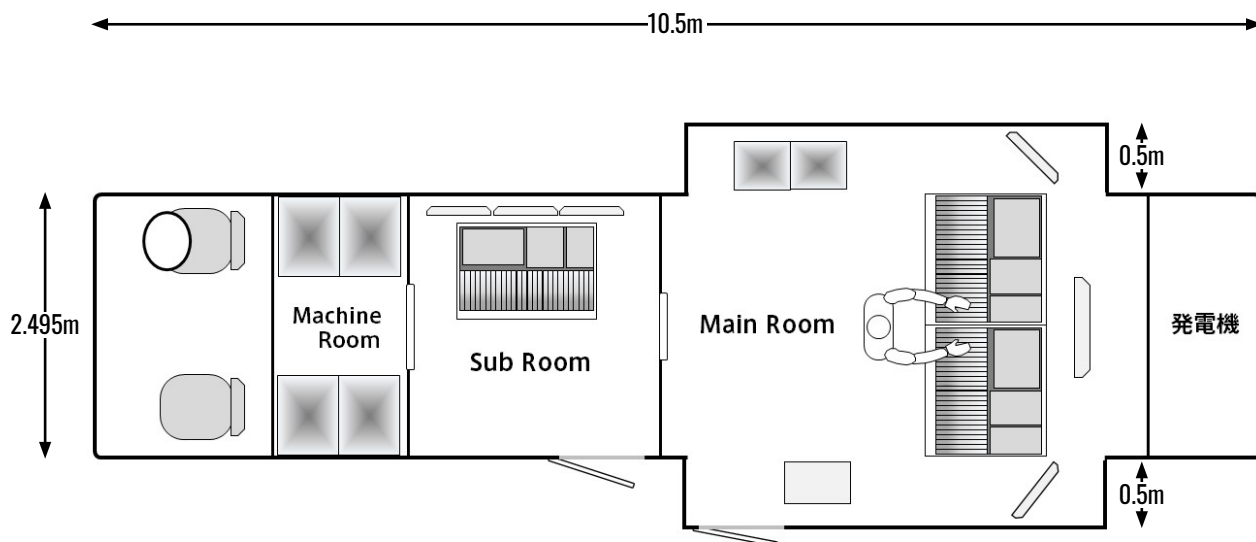

車両スペック

車両	いすゞ Long 10.5m Wide 2.495m expand 1.0m High 3.55m
発電機	富永物産製 HIT-20KK-31 φ AC100V 50/60Hz 20KVA
電源外部出力	C 型 30A × 1, 平行 × 2 (100V-15A)
商用電源入力	100V /200V 機器空調 一括 カムロック
CONSOLE	Main Room : TAMURA NT-880 (60Fader)
	Sub Room : TAMURA NT-660 (30Fader)
Analog I/O	Main Room : 208Mic/Line in(SB:48 × 3, 車内 :64) 98Line out(SB:16 × 3, 車内 :50)
	Sub Room : 168Mic/Line in(SB:48 × 3, 車内 :24) 96Line out(SB:16 × 3, 車内 :48)
Digital I/O	Main Room : 36AES in(SB:8 車内 :28) , 51AES out (SB:8 車内 :43)
	Main Room : 480MADI in (SB:64 × 3 車内 :64 × 4+32) 480MADI out (SB:64 × 3 車内 :64 × 4+32)
	Main Room : 64 × 2Dante in(SB でも 1 系統入力可能) 64 × 2Dante out(SB でも 1 系統出力可能)
	Sub Room : 24AES in(SB:8 車内 :16) , 31AES out(SB:8 車内 :23)
	Sub Room : 320MADI in (SB:64 × 3 車内 :64 × 2) 320MADI out (SB:64 × 3 車内 :64 × 2)
	Sub Room : 64Dante in 64Dante out
SDI in	Main Room : 2SDI in
	Sub Room : 2SDI in
GPIO in	Main Room : 12GPIO in
	Sub Room : 12GPIO in
INSERTION	Main Room : 24Analog , 4AES , 32MADI
	Sub Room : 8Analog , 8AES
Stage Box 1 I/O	48Mic/Line in , 16Line out / 64MADI in , 64MADI out / 64DANTE in , 64DANTE out
Stage Box 2 I/O	48Mic/Line in , 16Line out / 16AES in , 16AES out / 64MADI in , 64MADI out
Stage Box 3 I/O	48Mic/Line in , 16Line out / 64MADI in , 64MADI out
MONITOR SPEAKER	Main Room : Amphion One25A(STEREO) , GENELEC 8020A × 5 + 7050B(5.1)
	Sub Room : GENELEC 8020A × 5 + 7050B(5.1)
インカム	CLEAR-COM(IF4W-4)

車両イメージ



A車

TBS ACT



